


ZDL-VT-Series 2-Wire Multi-Extension Intercom System

**7-Inch
Touch Screen**



ZDL-T1

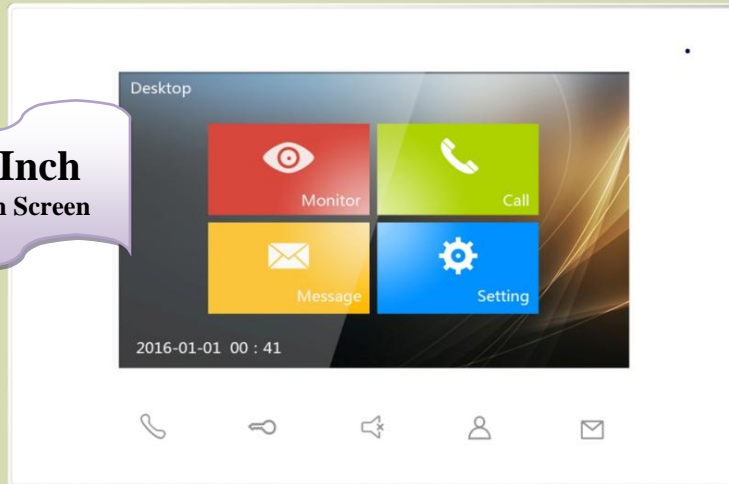

ZDL-T2



ZDL-T3



**ZDL - V1 SERIES 2 WIRE
MULTI EXTENSION HOME/OFFICE
COMMUNICATION INTERCOM SYSTEM**


SYSTEM FEATURES

- Direct Press Vandal/Waterproof HD Door Camera
- In-house Screen Auto-Display Guest Real-Time Video
- Support 6-Separate Door Camera Location
- Up To 12-Interior Touch-Screen Monitor Support
- Integrates Up To 18-CCTV Cameras
- Guest Video Event Recording With Playback
- Retrievable Guest Video Snapshots
- Up To 200-User Gate/Door Access KeyCards
- Integrates Surveillance DVR For Added Security
- In-house Voice Communication Between Extensions
- Language Choice: English, French, Espanol, Italiano Etc

Point-To-Point Calling Intercom



**6-Door + 12- Extension
Support**

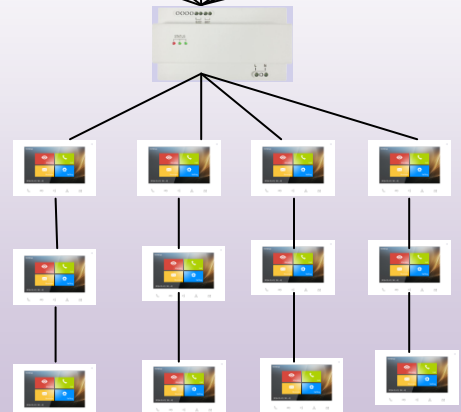

Got Other Technical Questions? Contact Your Local Dealer

ZDL-VT-Series 2-Wire Multi-Extension Intercom System

System Specification

Door Camera Power

Input: 100 - 240V ~ 50/60Hz [Adapter]
Output: 24~30VDC 1.5Amp

Consumption: 150MA
[Model: ZDL-WPS1 Adapter Included]
Support Corresponding Power Backup Battery.

Monitor Power

Input: 100 - 240V ~ 50/60Hz [Adapter]
Output: : 24~30VDC 1.5Amp

Consumption: 200MA
[Model: ZDL-WPS1 Adapter Included]
Support Corresponding Power Backup Battery.

Gate/Door Relay

Gates:
Compatible With Most Gate Openers.

Electric Strike:
Support All Door Strikes

Magnetic Locks:
Compatible With All Mag-Locks

Request To Exit:
Support Touch + No-Touch Exit Device
+++Gate Opener & Locks
"Requires Separate Power"

Camera + Screen Resolution

Camera: 2.0-Mega-Pixel HD
Monitor: 800 X 480 Soft Touch

ZDL-VT1~VT3 Door Panel Application

ZDL-VT1


1-Button Panel Ideal For Homes, Offices, Daycare. Support 6-Entry Doors With 12-Interior Extensions Capable Of Calling Between Rooms.

ZDL-VT2

Ideal For 2-Apartment Unit Application. Support 6-Entry Doors Plus 4-Interior Extension In Each Apartment. Support Point To Point Calling Between Rooms.

ZDL-VT3

Solution For 4-Separate Apartments. Support 6-Entry Doors Plus 4-Interior Extension In Each Apartment. Support Point To Point Calling Between Rooms.

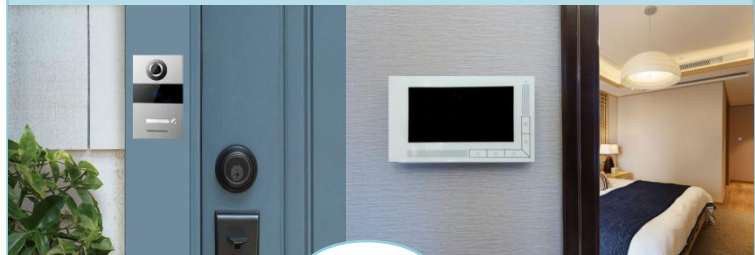

Got Other Technical Questions? Contact Your Local Dealer